


CIS ELEKTROTECHNIK GMBH
SPECIALIST FOR ELECTRICAL MARINE EQUIPMENT
SINCE 1993

WELLSEEDAMM 13
D-24145 KIEL-WELLSEE
TEL.: +49-431 71 97 003
FAX: +49-431 71 97 004
E-MAIL: INFO@CIS-SHIP.COM
WWW.CIS-SHIP.COM

PES – Digital Remote Indicator (DRI)

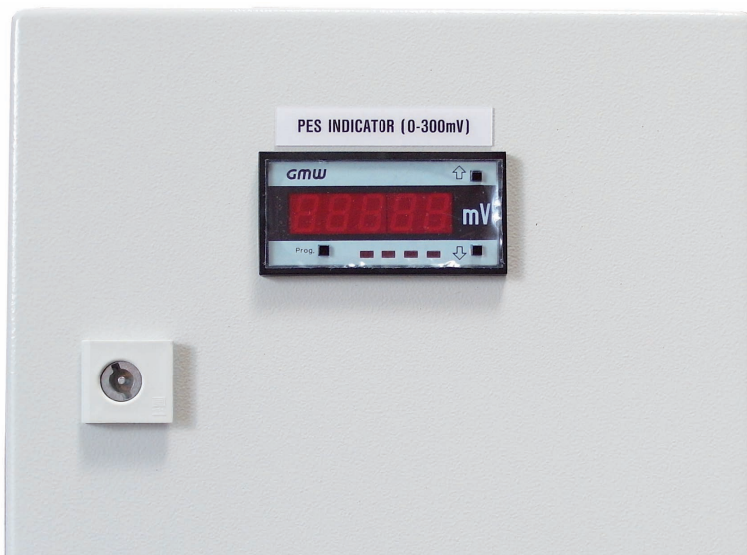

Technical Details

Measuring range:

0-300mV

Power Supply:

230V / 115V AC, 50/60 Hz
or 18...36V DC / 24V AC

Output:

analog 0 (4)...20mA
Relais 1: low alarm
Relais 2: high alarm

Dimension:

300 x 300 x 210 mm

Advantage of PES – DRI

The DRI for the PES (Propellershaft-Earthing-System) is a very simple and comfortable solution to read out the millivolt readings of the shaft earthing at the Ships automation system.

A 0(4)...20mA signal is provided.

In addition 2 alarms (low and high) are available via normally open and closed contact (NOC).